



## BSPP FEMALE - 60° CONE - 45° ELBOW (1)

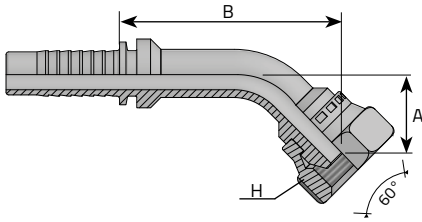

FEMMINA 45° BSPP SV 60°  
 FEMELLE 45° BSPP CÔNE 60°  
 DKR 45° BOGEN 60° KONUS (BSPP-GEWINDE)  
 HEMBRA GIRATORIA A 45° BSPP - CONO 60°

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F45G0302	-3	3/16"	4.8	1/8"	28	15	17	40	350	5076
F45G0304	-3	3/16"	4.8	1/4"	19	19	17	40	415	6019
F45G0402	-4	1/4"	6.4	1/8"	28	15	17	40	350	5076
F45G0404	-4	1/4"	6.4	1/4"	19	19	17	40	450	6526
F45G0406	-4	1/4"	6.4	3/8"	19	22	20	43	450	6526
F45G0408	-4	1/4"	6.4	1/2"	14	27	24	55	450	6526
F45G0504	-5	5/16"	7.9	1/4"	19	19	20	51	350	5076
F45G0506	-5	5/16"	7.9	3/8"	19	22	21	52	350	5076
F45G0508	-5	5/16"	7.9	1/2"	14	27	24	55	350	5076
F45G0604	-6	3/8"	9.5	1/4"	19	19	19	54	450	6526
F45G0606	-6	3/8"	9.5	3/8"	19	22	20	55	450	6526
F45G0608	-6	3/8"	9.5	1/2"	14	27	23	58	450	6526
F45G0806	-8	1/2"	12.8	3/8"	19	22	20	63	415	6019
F45G0808	-8	1/2"	12.8	1/2"	14	27	23	65	415	6019
F45G0810	-8	1/2"	12.8	5/8"	14	28	23	65	415	6019
F45G0812	-8	1/2"	12.8	3/4"	14	32	21	66	415	6019
F45G1008	-10	5/8"	16	1/2"	14	27	25	63	350	5076
F45G1010	-10	5/8"	16	5/8"	14	28	25	64	350	5076

## BSPP FEMALE - 60° CONE - 45° ELBOW (2)

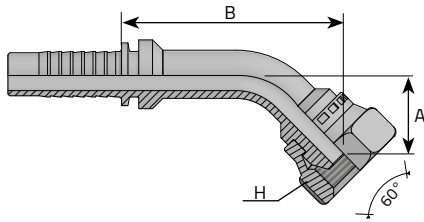

FEMMINA 45° BSPP SV 60°  
 FEMELLE 45° BSPP CÔNE 60°  
 DKR 45° BOGEN 60° KONUS (BSPP-GEWINDE)  
 HEMBRA BSPP CODO 45° ASIENTO 60°

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch		mm	Inch		mm	mm	mm		
F45G1012	-10	5/8"	16	3/4"	14	32	26	64	350	5076
F45G1208	-12	3/4"	19	1/2"	14	27	28	62	350	5076
F45G1210	-12	3/4"	19	5/8"	14	28	29	63	350	5076
F45G1212	-12	3/4"	19	3/4"	14	32	29	63	350	5076
F45G1216	-12	3/4"	19	1"	11	38	31	65	350	5076
F45G1612	-16	1"	25.4	3/4"	14	32	39	88	280	4061
F45G1616	-16	1"	25.4	1"	11	38	41	90	280	4061
F45G1620	-16	1"	25.4	1.1/4"	11	50	44	93	280	4061
F45G2020	-20	1.1/4"	31.8	1.1/4"	11	50	44	102	210	3046
F45G2024	-20	1.1/4"	31.8	1.1/2"	11	55	45	103	210	3046
F45G2424	-24	1.1/2"	38.1	1.1/2"	11	55	45	118	185	2683