


## FLANGE CODE 61 - 3000 PSI - 60° ELBOW

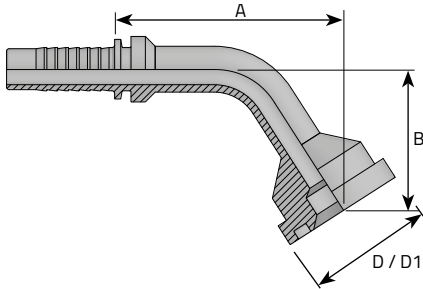

FLANGIA 60° SAE J518 3000 PSI INTERA  
 BRIDE 60° 3000 PSI (PIÈCE ENTIER)  
 60° FLANSCHANSCHLUSS 3000 PSI – EINTEILIG  
 BRIDA A 60° 3000 PSI (PIEZA UNICA)

\* komatsu flange / Flangia Komatsu/ Bride komatsu /  
 Flange komatsu / Brida komatsu  
 Do Not Include O-Ring / O-Ring Non Compresso /  
 Sans O-Ring / Ohne O-Ring/ Sin O-Ring

Code	Tube			Thread	Dimensions				Pressure	
	D.N.	Hose	Diam		D	D1	B	A	Bar	Psi
		Inch	mm		Inch	mm	mm	mm		
F60L0808I	-8	1/2"	12.8		1/2"	30.2	-	63	350	5076
* F60L0810I	-8	1/2"	12.8		5/8"	34	-	68	350	5076
F60L0812I	-8	1/2"	12.8		3/4"	38.1	-	68	350	5076
F60L1008I	-10	5/8"	16		1/2"	30.2	-	59	350	5076
* F60L1010I	-10	5/8"	16		5/8"	34	-	63	350	5076
F60L1012I	-10	5/8"	16		3/4"	38.1	-	63	350	5076
F60L1208I	-12	3/4"	19		1/2"	30.2	-	63	350	5076
F60L1212I	-12	3/4"	19		3/4"	38.1	-	67	350	5076
F60L1216I	-16	3/4"	25.4		1"	44.5	-	70	350	5076
F60L1612I	-16	1"	25.4		3/4"	38.1	-	83	280	4061
F60L1616I	-16	1"	25.4		1"	44.5	-	86	280	4061
F60L1620I	-16	1"	25.4		1.1/4"	50.8	-	90	280	4061
F60L2016I	-20	1.1/4"	31.8		1"	44.5	-	96	210	3046
F60L2020I	-20	1.1/4"	31.8		1.1/4"	50.8	-	100	210	3046
F60L2024I	-20	1.1/4"	31.8		1.1/2"	60.3	-	101	210	3046
F60L2424I	-24	1.1/2"	38.1		1.1/2"	60.3	-	112	185	2683
F60L2432I	-24	1.1/2"	38.1		2"	71.4	-	123	185	2683
F60L3232I	-32	2"	50.8		2"	71.4	-	148	170	2466